

original

4964
8553/221

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
26 April 2001 (26.04.2001)

PCT

(10) International Publication Number
WO 01/28317 A1

JC997 U.S. PTO
09/884829



(51) International Patent Classification⁷: A01K 3/00

Karel [NL/NL]; 5 Boterbloemstraat, NL-2971 BR Bleskensgraaf (NL).

(21) International Application Number: PCT/NL00/00661

(22) International Filing Date:
19 September 2000 (19.09.2000)

(74) Agent: CORTEN, Maurice, Jean, F., M.; 10 Weverskade, NL-4155 PD Maasland (NL).

(25) Filing Language: English

(81) Designated States (*national*): AU, CA, IL, JP, KR, NZ, US.

(26) Publication Language: English

(84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

(30) Priority Data:
1013349 20 October 1999 (20.10.1999) NL

(71) Applicant (*for all designated States except US*): LELY RESEARCH HOLDING A.G. [CH/CH]; 20 Bützenweg, CH-6300 Zug (CH).


Published:
— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): VAN DEN BERG,

(54) Title: AN IMPLEMENT FOR DEMARCATING AN AREA, AS WELL AS A VEHICLE SUITABLE FOR BEING USED IN SAID IMPLEMENT

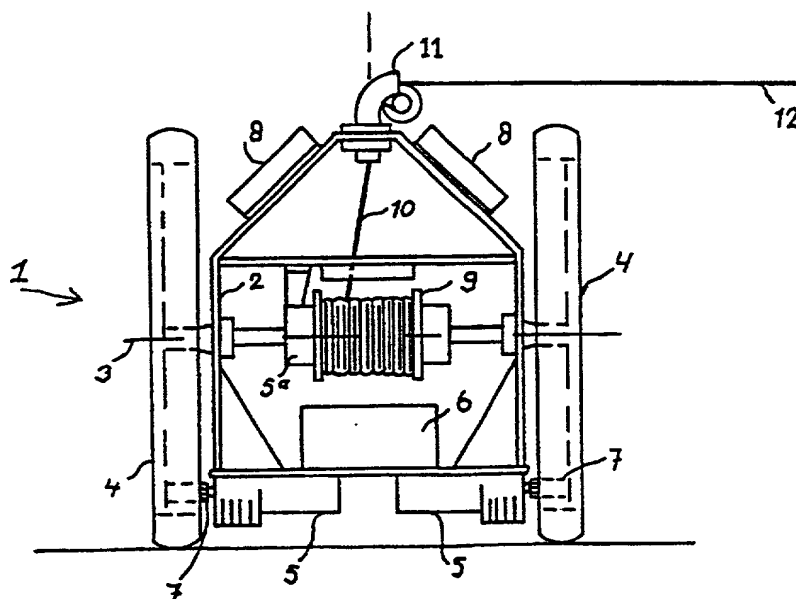

(57) Abstract: An implement for demarcating an area, in particular for restricting the freedom of movement of animals walking about freely, is provided with a demarcation element (10) which is capable of being wound and unwound and being tightened. To said implement there is connected at least one vehicle (1, 1', 1''), which is suitable for bringing an end of a straight, tightened section (12) of the demarcation element (10) into a desired position. The other end of the straight, tightened section (12) can be positioned with the aid of a further vehicle (1, 1', 1'') or by means of a fixed reference point (18). The implement is compact and yet extremely flexible.

T06T90" 62848860

WO 01/28317 A1